



DESSALATOR DUO - Quick Guide for regular use

START-UP PROCEDURE

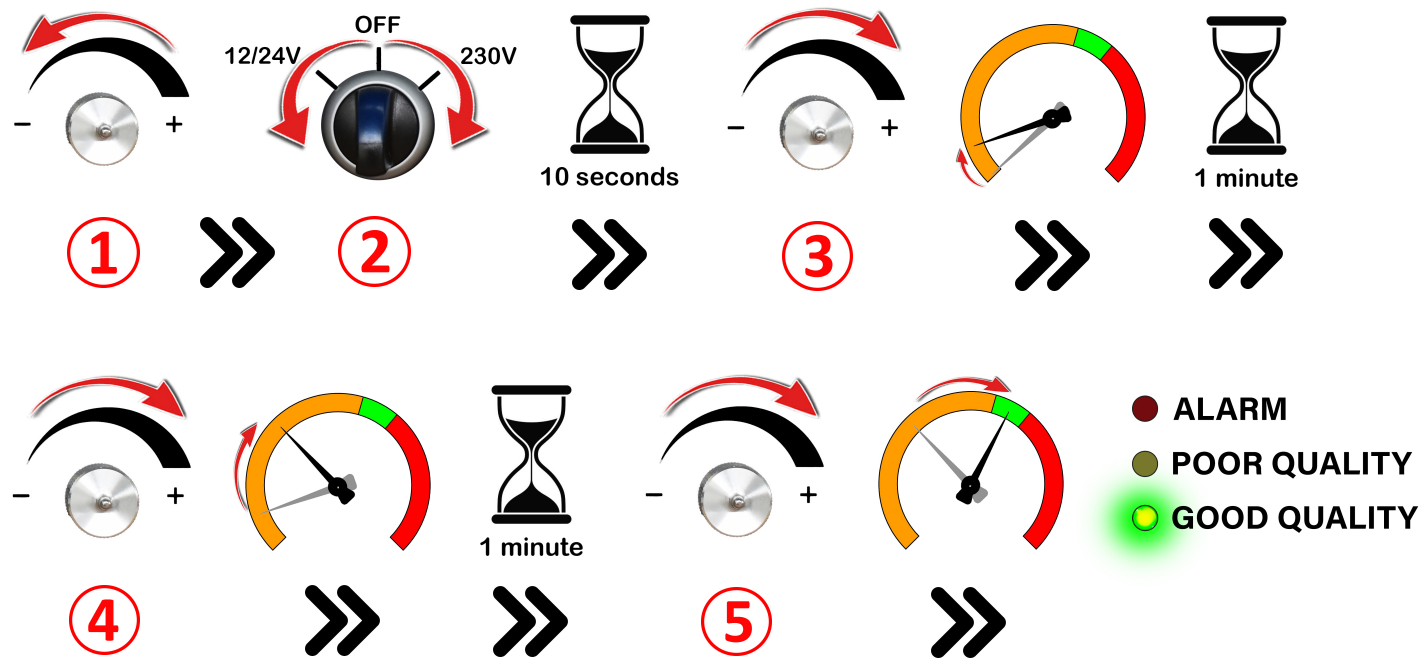

SHUTDOWN PROCEDURE

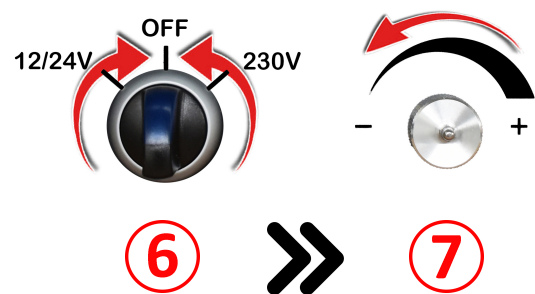

This Quick Guide is intended only as a reminder for everyday use. Make sure you are familiar with the contents of the full manual before using your watermaker. See www.dessalator.com or flash this QR code.

QGDUO V1.5 en - 051122



- 1** Make sure the hull valve for the watermaker is opened, the selection valve on the pre-filter is in the sea water position and turn the pressure regulator knob almost fully counter clockwise (towards the [-] position).
- 2** Select the power source to be used: 12/24VDC or 230VAC.
- 3** Wait until only the YELLOW LED blinks. Slightly increase the pressure up to 8 o'clock on the pressure gauge using the regulator knob. Stay in this position for about one minute.
- 4** Increase the pressure to 11 o'clock using the regulator knob. Stay in this position for about one minute.
- 5** Now you can increase the pressure to the green zone on the pressure gauge. When the water quality LED lights up green, your water maker produces fresh water.
- 6** Set the power switch to OFF, to stop the water maker.
- 7** Turn the knob pressure regulator almost fully counter clockwise (towards the [-] position).



DESSALATOR[®]

www.dessalator.com

