


# DESSALATOR AC PRO COMPACT & CAD

## Quick Guide for regular use

### START-UP PROCEDURE

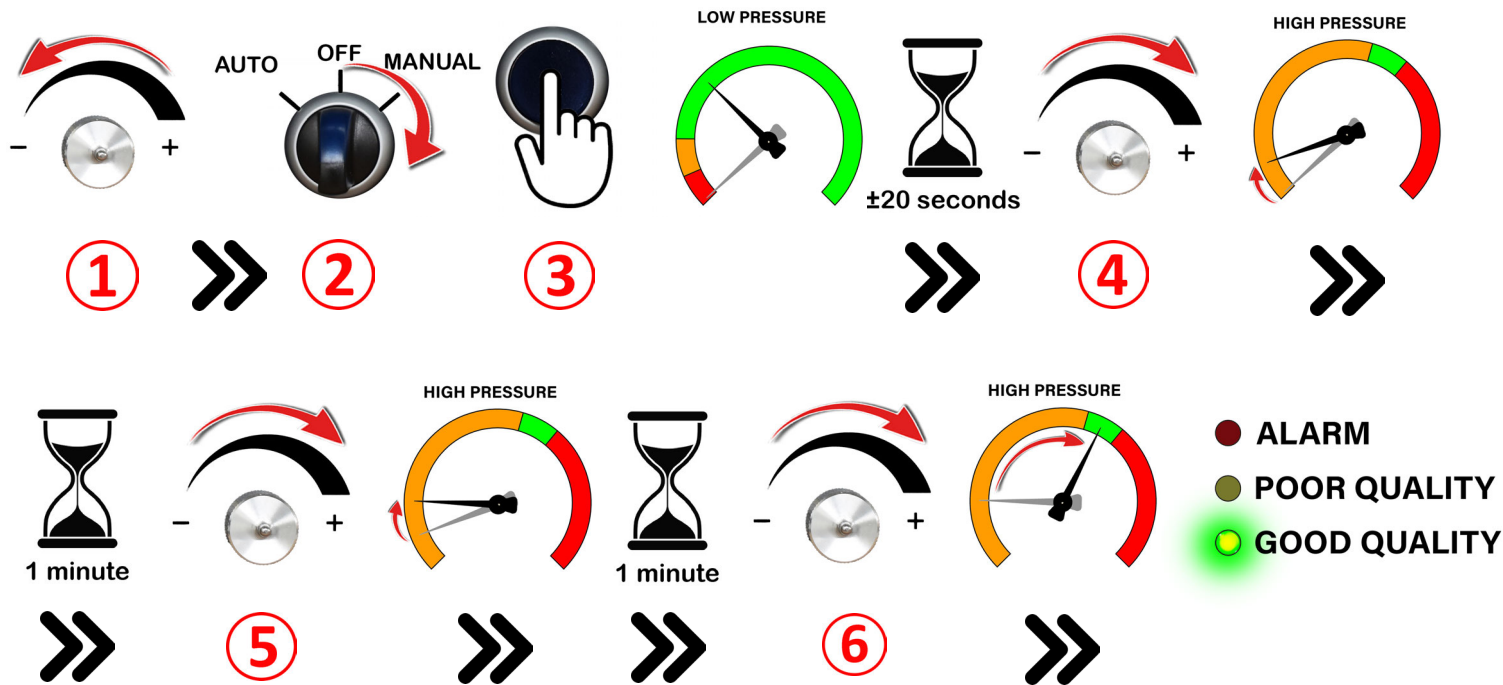

- 1** Make sure the hull valve for the watermaker is opened, the selection valve on the pre-pump is in the sea water position and turn the pressure regulator knob almost fully counter clockwise (towards the [-] position).
- 2** Set the switch to MANUAL.
- 3** Press the START Button. The pre-pump will start, wait until only the YELLOW LED blinks.
- 4** Slightly increase the pressure up to 7 o'clock on the pressure gauge using the regulator knob. Stay in this position for about one minute.
- 5** Then increase the pressure to 9 o'clock using the regulator knob. Stay in this position for about one minute.
- 6** Now you can increase the pressure to the green zone on the pressure gauge. When the water quality LED lights up green, your water maker produces fresh water.

### SHUTDOWN PROCEDURE



- 7** Set the power switch to OFF, to stop the water maker.
- 8** Turn the knob pressure regulator almost fully counter clockwise (towards the [-] position).

This Quick Guide is intended only as a reminder for everyday use. Make sure you are familiar with the contents of the full manual before using your watermaker. See [www.dessalator.com](http://www.dessalator.com) or flash this QR code.

QGACPRO V1.9 en 11/23



**DESSALATOR**<sup>®</sup>  
[www.dessalator.com](http://www.dessalator.com)

